


Digital Recorder

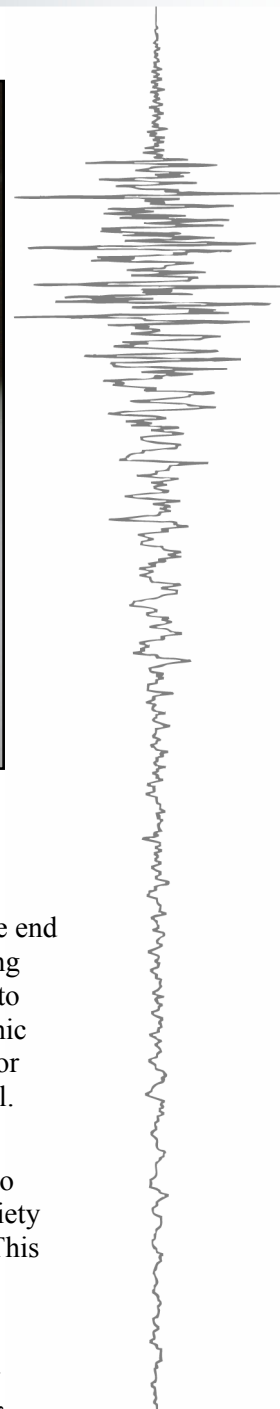

Digital Recorder

KEY BENEFITS

- Dynamic range greater than 114 dB
- Modular design that allows multi-channel expansion to 6 or 12 channels
- Multi-tasking operating system that allows simultaneous data acquisition and interrogation
- Timing accuracy to ± 0.5 ms due to synchronized sampling with optional GPS timing system
- Zero Channel Skew through the utilization of individual A/D converters for each channel
- Remote alerting capability for system event or auto-diagnostic failure
- Remote data acquisition with real time digital data output
- Interconnectivity with other Altus Family recorders for common triggering and shared GPS (option)
- Common user interface, file format, and support tools with other Altus family recorders

INTRODUCTION

The **K2** is a full-featured Digital Recorder designed with the end user in mind. Technical advances and innovative engineering have increased performance and flexibility of this recorder to offer a dynamic range greater than 114 dB. The high dynamic range and superior resolution offer significant advantages for applications where signal fidelity and data integrity are vital.

In order to provide the greatest flexibility in data storage, retrieval and communications, Kinematics has included two fully compliant PCMCIA card slots that support a wide variety of nonproprietary memory cards, hard disks and modems. This allows users to easily configure the **K2** for their specific applications.

Developed for Microsoft Windows™, our QuickTalk® and QuickLook® software provide a user-friendly environment, making system setup, communications and rapid data analysis quick and easy.

MAJOR APPLICATIONS

- Structural monitoring arrays
- Dense arrays, two and three dimensional
- Aftershock study arrays
- Local, regional and national seismic networks and arrays

Input Channels

Sensor channels:	3 standard (+1); 6 and 12 optional
Input level:	Standard $\pm 2.5V$ Optional 40 Vpp ($\pm 10V$ differential)
Gain:	User selectable of X1, X3, X10, X30, X100 (opt)
Damping:	Provisions for internal resistor (opt)
Calibrator:	Simple calibration pulse

Data Acquisition

Type:	Over-sampled Delta Sigma system with 24-bit DSP
Anti-alias filter:	Brickwall FIR filter. Cut-off at 80 % of output Nyquist; 120 dB down at output Nyquist
Dynamic range:	~ 114 dB (200 sps 0-50Hz BW RMS noise/RMS clip)
Frequency response:	DC to 80 Hz @ 200 sps
Sampling rates:	20, 40, 50, 100, 200, 250 sps
Chan.-chan. skew:	None – simultaneous sampling of all channels
Acquisition modes:	Continuous, trigger
Output data format:	24 bit signed (3 bytes)
Parameter calculations:	Calculations of key parameters in real-time
Real time digital output:	RS-232 output of digital stream (contact factory for available formats)

Trigger

Type:	IIR bandpass filter (three types available)
Trigger selection:	Independently selected for each channel
Threshold trigger:	Selectable from 0.01% to 100% of full scale
Trigger voting:	Internal, external trigger votes with arithmetic combination
Additional trigger:	STA/LTA

Storage

Type:	Fully compliant PCMCIA storage system (two slots)
Compatibility:	PCMCIA standard 2.1; sockets accept Type I, II, III card formats Type I or II modem Optional: Ethernet 10 Base-T LAN interface
Storage primary slot:	32 MB Memory Card (minimum) Optional larger cards available.
Storage 2 nd slot:	Same as primary slot
Parallel 2 nd slot:	Accepts Type I or II modem with connectors
Recording capacity:	Approximately 2.6 minutes per channel per MB on Memory Card, 24-bit data @ 200 sps.
Recording format:	Data is stored in DOS file system allowing cards to be read directly by PC.

Firmware

Type:	Multi-tasking operating system supports simultaneous acquisition and interrogation; boot loader allows remote firmware upgrades
System control:	Configure sample rate, filter type, trigger type and voting, maintains communications and event storage
User interface:	Packetized protocol and simple terminal loop control and data retrieval via RS-232 interface
Intelligent alerting:	System can be configured to initiate communications when an event is detected or if an auto-diagnostic failure occurs
Auto-diagnostics:	System can be configured to continuously check system voltages, temperature, RAM and code integrity, timing system integrity
Rapid setup:	Unit can be configured from parameter file stored in PCMCIA memory card

Timing

Type:	Free running disciplined oscillator (standard); GPS (opt)
GPS option:	Integrates completely with system, providing timing, internal oscillator correction and position information
Shared GPS:	Allows a group of interconnected Altus recorders to share one GPS module (option)
Timing accuracy:	5 microseconds of UTC with GPS
Power:	Power cycling is software controlled
Power consumption:	110 mA at 12V (active)

I/O and Display

Display:	Matrix of 8 LEDs. Display indicates acquisition mode, event, recording, battery voltage, memory capacity used
Power input:	Mil-style connector for 24 Vdc charge input, external battery, standby power
RS-232 input:	Full RS-232C interface with modem control
Aux. input:	Mil-style connector for 4th channel input, IRIG out, IRIG in, clock sync., 1 pps out, trigger in, trigger out, alarm out, real time digital output (tx & rx), ext 12V out. Interface for interconnection of multiple units
EMI/RFI protection:	All I/O lines are protected from both EMI/RFI emission and susceptibility problems by ferrite filters and transient suppressors

Power Supply

Type:	High efficiency switched power supply and charger system
Input:	Nominal 24 Vdc from charger
Operating range:	10.5V to 15V
Ext. charger voltage:	100-250 Vac 50/60 Hz
Charging voltages:	Temperature compensated for lead acid gel cell, 2 outputs with separate protection circuitry allows unit to recharge flat battery and work with reversed or damaged battery in multi battery system
Fuses:	Four 2 amp fuses for charger and batteries
Batteries:	Internal battery 12V 12 Ah (standard); external battery (opt)
Current drain:	390 mA @12V (standard configuration)
Power autonomy:	>36 hours with internal battery

Housing

Type:	Lexan structural foam housing internally coated with EMI/RFI shielding material, 5/16" aluminum base support for mounting
Mounting:	Single hole for 1/4" stud
Size:	10.1" (256 mm) W x 15.0" (381 mm) L x 7" (178 mm) H
Weight:	10.9 kg (24 lbs) including battery

Communications

RS-232 interface:	Parameter setup, real-time telemetry and event retrieval.
PCMCIA modem:	Remote access, initiated by user or by the K2. Optional
Ethernet interface:	Connect the K2 directly to your IP based Wide Area Network (WAN). Optional
FTP via Modem:	FTP transmission of events via dial-up ISP. Optional

Support Software

<i>QuickTalk</i> ^{®*} :	Windows-based control and data retrieval program for easy setup and data retrieval by direct connection or modem.
<i>QuickLook</i> ^{®*} :	Windows-based data retrieval program for rapid review of waveforms and event information. Also operates with DOS communication software
<i>Antelope</i> :	Comprehensive commercial network operational and mgmt system for medium and large networks
<i>Earthworm</i> :	Comprehensive public domain network operational and management system for medium and large networks
<i>NMS</i> :	Commercial PC-based network management system for small to medium sized networks via modem or real-time data
<i>SMARTS</i> :	Commercial open architecture user-extensible real-time data collection and processing software that runs on a variety of computers
<i>PSD</i> :	Commercial Pseudo Spectral Density software for earthquake data analysis
<i>SMA</i> :	Commercial Strong Motion Analyst software for earthquake data analysis and processing
<i>K2COSMOS</i> [*] :	Conversion software from Altus EVT file format to COSMOS v1.20 format
Format Converters [*] :	Provides option to convert and store data in ASCII and other formats. Contact Kinometrics for other options.

*No charge

Environment

Operating temp.:	-20° to 70°C
Humidity:	0-100% RH